

*Power You Can
Depend On*



PLP Series

Valve Regulated Lead Acid Battery

— Designed for UPS Standby Power Applications



WWW.CDTROJAN.CN

PLP Series



PURE LEAD PLUS

Valve Regulated Lead Acid Battery

Designed for UPS Standby Power Applications



Applications

- Data Centers
- Network Operation Centers
- Industrial Process Control Facilities
- Internet Housing Sites
- Semiconductor Manufacturing
- Banks and Financial Markets
- Power Generation Plants
- Hospital and Testing Laboratories
- Emergency Response Center

Features and Benefits

- 15 year design life
- Eurobat classification: Long life
- Pure Lead Paste for long life, extreme high rate and stable performance
- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance
- UL Recognized Flame-arresting vents in each cell for safety and long life
- Flame retardant polypropylene case and cover compliant with UL94 V-0
- Designed with the same recombination, thermal runaway prevention, gassing and flame-retardant characteristics of the Bellcore 4228 compliant Dynasty Telecom products
- Designed to be compliant with international standard IEC 60896-21/22
- C&D's Long-Life Alloy having very low calcium levels in the industry -minimizing grid growth, reducing gassing, and extending battery life
- C&D's plate processing technology for high active materials utilization- result in high energy density and low flow currents
- Thermally welded and Helium leak tested case-to-cover bond to ensure a robust leak proof seal
- Manufactured in accordance with ISO 9001, ISO 14001, ISO 45001 and ISO 50001
- Not restricted for air transport -Complies with IATA/ICAO Special Provisions A67
- Not restricted for surface transport -Classified as non-hazardous material as related to DOT-CFR Title 49 parts 171-189
- Not restricted for water transport -Classified as non-hazardous material per IMDG Amendment 27.

Specifications

Model	V	C20 (Ah) 1.75EPV,25°C	C10 (Ah) 1.80EPV,20°C	C8 (Ah) 1.75EPV,25°C	5min Watt/cell @ 1.67EPV	Dimensions/mm (L*W*H*total Height)				Weight/ kg	Terminal Type (Bolt)
UPS 12-1100 PLP	12	34	30	30	177.9	197	132	166	173	10.7	Inserted(#10-32 UNF)
UPS 12-1500 PLP	12	36	32	33	249.0	197	132	166	173	12.4	Inserted(#10-32 UNF)
UPS 12-2200 PLP	12	56	49.5	50	371.4	242	142	200	205	19.0	Inserted(#10-32 UNF)
UPS 12-3300 PLP	12	84	76.6	79	552.4	273	173	201	204	27.0	Inserted (1/4-20 UNC)
UPS 12-3800 PLP	12	102	90	91	643.0	319	173	203	206	31.5	Inserted (1/4-20 UNC)
UPS 12-4000 PLP	12	110	97	99	667.4	341	173	213	216	35.3	Inserted (1/4-20 UNC)
UPS 12-4700 PLP	12	114	103	106	779.6	341	173	215	218	38.0	Inserted (1/4-20 UNC)
UPS 12-4800 PLP	12	150	134	138	782.0	345	173	275	278	46.6	Inserted (1/4-20 UNC)
UPS 12-5400 PLP	12	154	137	141	883.1	345	173	275	278	48.6	Inserted (1/4-20 UNC)
UPS 12-6300 PLP	12	140	128	131	1032.7	345	173	275	278	52.9	Inserted (1/4-20 UNC)
UPS 12-6900FD PLP	12	228	204	210	1149.8	525	239	227	227	66.0	Inserted(M8)
UPS 12-7000FD PLP	12	234	210	216	1182.6	525	239	227	227	67.3	Inserted(M8)
UPS 12-7900FD PLP	12	226	203	210	1324.4	525	239	227	227	71.0	Inserted(M8)
UPS 12-8200FD PLP	12	236	211	218	1374.0	525	239	227	227	72.0	Inserted(M8)
UPS 12-4200F PLP	12	110	99	102	711.6	511	109	231	231	37.1	Inserted (M6)
UPS 12-6200F PLP	12	172	158	162	1042.5	559	125	278	278	55.2	Inserted (M8)
UPS 12-6800F PLP	12	202	182	189	1134.6	559	125	322	322	64.9	Inserted (M8)
UPS 12-8000F PLP	12	252	230	238	1347.9	559	154	322	322	77.3	Inserted (M8)
UPS 12-9200F PLP	12	254	231	238	1542.8	559	154	322	322	84.1	Inserted (M8)

*All dimensions are for reference only. Model name with "F" means Front Access battery. Contact a C&D Representative for complete dimensional information.

Specifications


Model	Cells Per Unit	Maximum Discharge Current (Amps)	IEC Short Current (Amps)	IEC Resistance (mΩ)
UPS 12-1100 PLP	6	300	1003	12.35
UPS 12-1500 PLP	6	300	1475	8.45
UPS 12-2200 PLP	6	300	1985	6.37
UPS 12-3300 PLP	6	800	2381	5.29
UPS 12-3800 PLP	6	800	2734	4.65
UPS 12-4000 PLP	6	800	3199	4.06
UPS 12-4700 PLP	6	800	3350	3.77
UPS 12-4800 PLP	6	800	3160	3.96
UPS 12-5400 PLP	6	800	3613	3.48
UPS 12-6300 PLP	6	800	4146	2.99
UPS 12-6900FD PLP	6	1000	5150	2.80
UPS 12-7000FD PLP	6	1000	5300	2.70
UPS 12-7900FD PLP	6	1200	5900	2.40
UPS 12-8200FD PLP	6	1200	6150	2.30
UPS 12-4200F PLP	6	800	2864	4.40
UPS 12-6200F PLP	6	800	3698	3.40
UPS 12-6800F PLP	6	900	4400	2.80
UPS 12-8000F PLP	6	1200	5376	2.31
UPS 12-9200F PLP	6	1200	5543	2.28

PLP Series

Specifications

Operating Temperature Range with temperature compensation	Discharge: -40°F (-40°C) to +160°F (71°C)
Nominal Operating Temperature Range	Charge: -10°F (-23°C) to +140°F (60°C)
Recommended Maximum Charging Current Limit	+74°F (23°C) to +80°F (27°C)
Float Charging Voltage	C/5 amperes @ 20hr rate
Maximum AC Ripple (Charger)	13.65 ± 0.15 VDC average per 12V unit
Self Discharge	0.5% RMS or 1.5% P-P of float charge voltage recommended for best results. Max voltage allowed = 1.4% RMS (4% P-P) Max current allowed = C/20 A RMS
Equalize charge and cycle service voltage	Battery can be stored up to 4 months at 77°F (25°C) before a freshening charge is required. Batteries stored at temperatures greater than 77°F (25°C) will require recharge sooner than batteries stored at lower temperatures. See C&D brochure 41-7272, Self-Discharge and Inventory Control for details.
	14.40 to 14.80 VDC average per 12V unit @ 77°F (25°C)

Battery Terminations

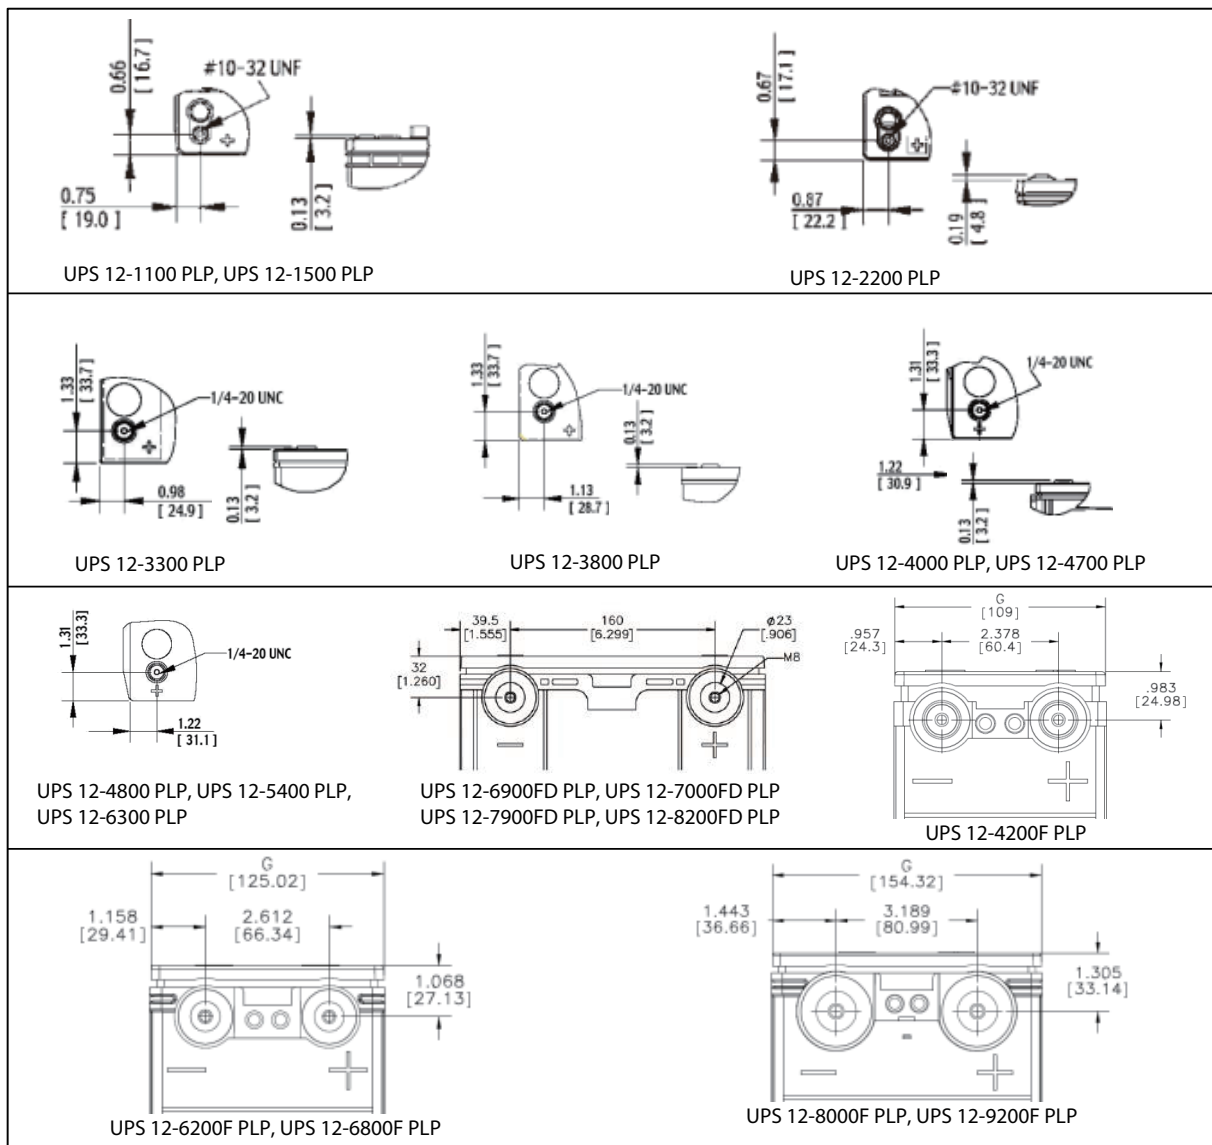

Note: Specifications subject to change without notification.
 Batteries to be mounted with 15 mm spacing minimum and free air ventilation.
 The design life listed indicates the service life under ideal service conditions.
 Changes in service conditions do not affect the design life, but the actual service life will be shorter than the design life.



TECHNOLOGIES

Contact us

Headquarters

C&D Technologies, Inc.
200 Precision Road
Horsham, PA 19044 USA

Europe

C&D Technologies (UK) Limited
Unit 25, Romsey Industrial Estate, Greatbridge Road
ROMSEY, Hampshire, SO51 0HR, UK
Office: +44 (0) 1794 518 173
E-mail: Gdailly@cdtrojan.com

Middle East & Africa

C&D TECHNOLOGIES (UK) LIMITED
LOB 15 – OFFICE 413
PO BOX 263116
JEBEL ALI FREE ZONE
DUBAI – UNITED ARAB EMIRATES
PH: +971 5045 494 79
E-mail: phockings@cdtrojan.com

C&D Tech Power Solutions (India) Private Limited

Tel: (91)97 6705 8489
E-mail: rsingh@cdtrojan.com.cn

C&D Technologies (Hong Kong) Ltd.

Tel: (852) 2119 9870
Fax: (852) 2117 0342
E-mail: Bhui@cdtrojan.com

C&D Tech (Singapore) Pte Ltd.

Tel: (65) 6291 1031
Fax: (65) 6291 0767
E-mail: Bhui@cdtrojan.com

C&D Trojan (Shanghai) Energy Technologies Co., Ltd.

Tel: 400-678-3721

C&D Trojan (Shanghai) Power Technologies Co., Ltd.

No.55 Liandu Road, Spark Development Zone, Shanghai, China
Tel: (86) 21 3711 1222

C&D Jiangsu Technologies Co., Ltd.

Circular Economy Industrial Park
Pizhou High-tech Industrial Development Zone,
Jiangsu Province China 221300
Tel: (86) 516 8687 9857

Website

www.cdtrojan.cn

China Service Hotline: 400-678-3721

C&D reserves the right to revise the data and information provided in this catalogue.